

Standard Colors



Premium Colors

Premium colors require a nominal surcharge.



Metallic Colors

Metallic colors are premium finishes which require a nominal surcharge.




Natural Metal Finish

Acrylic-Coated Galvalume® is a coated sheet product that combines the corrosion resistance of Galvalume® steel sheet with a clear, organic resin applied to the top side and bottom side of Galvalume® substrate.




Acrylic-Coated Galvalume®

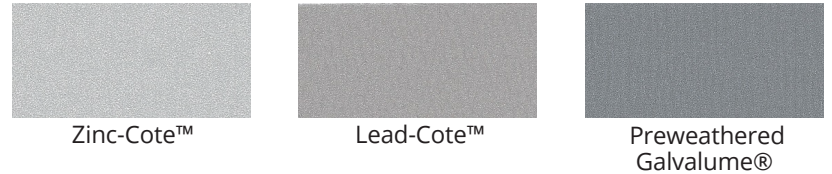

Print Pattern Finishes

Consult BMC on print pattern pricing and availability.

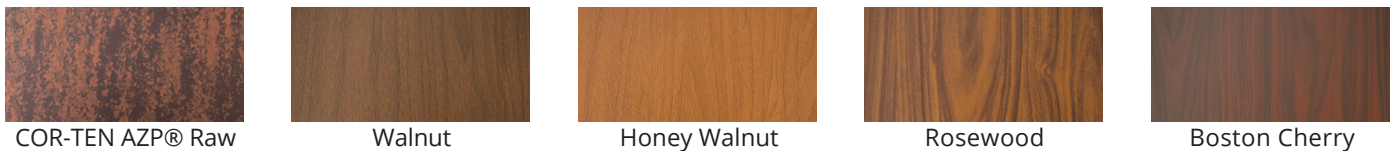

BERRIDGE STOCK AVAILABILITY AND COLOR DETAILS

S - Stock Color N - Non-Stocking Color N/A - Not Available

Standard Colors	24 Gauge		22 Gauge*		0.032 Aluminum*		0.040 Aluminum*		SR	EM	SRI	
	48" 42"		48" 42"		48" 42"		48" 42"					
Aged Bronze	SS		SN		NN		NN		0.31	0.85	31	
Almond	SS		SN		NN		NN		0.65	0.86	77	
Bristol Blue	SS		NN		NN		NN		0.33	0.85	33	
Buckskin	SS		SN		NN		NN		0.43	0.83	46	
Burgundy	SS		NN		NN		NN		0.32	0.84	32	
Charcoal Grey	SS		SS		NN		NN		0.29	0.84	28	
Cityscape	SS		SS		NN		NN		0.48	0.85	54	
Colonial Red	SS		NN		NN		NN		0.35	0.83	35	
Copper Brown	SS		NN		NN		NN		0.32	0.85	32	
Dark Bronze	SS		SS		NN		NN		0.28	0.85	27	
Deep Red	SS		NN		NN		NN		0.41	0.84	44	
Evergreen	SS		NN		NN		NN		0.30	0.83	29	
Forest Green	SS		SN		NN		NN		0.30	0.83	29	
Hartford Green	SS		NN		NN		NN		0.27	0.83	25	
Hemlock Green	SS		NN		NN		NN		0.31	0.84	31	
Matte Black	SS		SS		NN		NN		0.26	0.83	24	
Medium Bronze	SS		SS		NN		NN		0.31	0.85	31	
Parchment	SS		SN		NN		NN		0.60	0.85	71	
Patina Green	SS		NN		NN		NN		0.34	0.85	35	
Royal Blue	SS		NN		NN		NN		0.27	0.85	26	
Shasta White	SS		SN		NN		NN		0.61	0.85	73	
Sierra Tan	SS		SN		NN		NN		0.39	0.85	42	
Teal Green	SS		NN		NN		NN		0.26	0.84	25	
Terra - Cotta	SS		NN		NN		NN		0.36	0.84	38	
Zinc Grey	SS		SS		NN		NN		0.39	0.85	42	
	S S		S S				N/A N/A		0.67	0.20	59	
Acrylic-Coated Galvalume®	N/A N/A											
Premium Colors*												
Award Blue	S	S	N	N	N	N	N	N	0.1	0.8	11	
Natural White	S	S	N	N	N	N	N	N	7	3	86	
Metallic Colors*												
											0.7	0.8
Antique Copper-Cote	S	S	N	N	N	N	N	N	0.33	0.84	3	
Champagne	S	S	N	N	N	N	N	N	0.40	0.85	4	
Copper-Cote™	S	S	N	N	N	N	N	N	0.51	0.85	4	
Lead-Cote™	S	S	N	N	N	N	N	N	0.36	0.86	3	
Prewheathered Galvalume®	S	S	N	N	N	N	N	N	0.40	0.85	5	
Zinc-Cote™	S	S	N	N	N	N	N	N	0.53	0.83	9	
Print Pattern Finishes**												
COR-TEN AZP® Raw											3	
Walnut	S	N	N	N	N/A	N/A	N/A	N/A	0.32	0.89	8	
Honey Walnut	S	N	N	N	A	A	A	A	-	-	4	
Rosewood	S	N	N	N	N/A	N/A	N/A	N/A	-	-	3	
Boston Cherry	S	N	N	N	A	A	A	A	-	-	5	
	S	N	N	N	N/A	N/A	N/A	N/A	-	-	9	

Testing results for Kynar 500® or Hylar 5000® PVDF Resin-Based Color Finishes coil coating applications:

Specular Gloss: (ASTM D-523) Low and medium gloss only
 Color Uniformity: (ASTM D-2244) Color controlled both instrumentally and visually
 Dry Film Thickness: (ASTM D-7091, ASTM D-1005, NCCA 11-13, 11-14, 11-15) Primer 0.20 ± 0.05 mil, topcoat 0.75 ± 0.05 mil
 Hardness: (ASTM D-3363, NCCA 11-12, Eagle Turquoise Pencils) HB Minimum
 Adhesion (X-Cut): (ASTM D-3359) No adhesion loss
 Adhesion (Crosshatch): (ASTM D-3359) No adhesion loss
 Abrasion Coefficient: (ASTM D-968) 100 liters/mil topcoat
 Direct Impact Flexibility: (ASTM D-2794, Gardner Impact Tester, 1/10" Distortion) Excellent, no removal
 Reverse Impact Flexibility: (NCCA Spec. 11, ASTM D-2794, Gardner Impact Tester, 5/8" ball Impact force in inch pounds equal to metal thickness) Excellent, no cracking or loss of adhesion
 Formability: (ASTM D-4145, 180° T-Bend on 1/8 Mandrel) No cracks or loss of adhesion
 Erosion: (20 years, 45° South Florida) Maximum 15% loss
 Humidity Resistance: (ASTM D-2247) Passes 2000 hours on Galvalume® and 4000 hours on Aluminum
 Acid Resistance: (ASTM D-1308, Proc. 3.1.1, 10% Sulfuric Acid spot test, 24 hour exposure) Excellent, no effect
 Salt Spray Resistance: (ASTM B-117) Passes 2000 hours on Galvalume® and 4000 hours on Aluminum
 Alkali Resistance: (ASTM D-1308, Proc. 5.2, 10% Sodium Hydroxide, 24 hour exposure) Excellent, no effect
 Detergent Resistance: (ASTM D-2248, 72 hours immersion in 3% solution at 100°F) Excellent, no effect
 Resistance to Acid Pollutants: (ASTM D 1308 Proc. 3.1.1, 24 hour exposure 10% HNO3 vapors) Excellent, no effect
 Weathering - Color Retention: (ASTM D-2244, 20 years, 45° South Florida) Maximum 5 NBS units color change
 Weathering - Chalk Resistance: (ASTM D-4214, 20 years, 45° South Florida) Not worse than No. 8 rating

Notes:
 1. ASTM - American Society for Testing Materials
 2. NCCA - National Coil Coating Association
 3. Galvalume® is 55% Aluminum-Zinc alloy coated sheet steel and is a registered trademark of BIEC International Inc.
 4. Kynar 500® is a registered trademark belonging to Arkema, Inc.
 5. Hylar 5000® is a registered trademark belonging to Solvay Solexis, Inc.

S Stock Color; Not subject to a minimum order
 N Non-Stock Color; Subject to inventory on hand; 4,500 sf minimum order for 22 Gauge and 0.032 & 0.040 Aluminum
 N/A Not Available
 * Consult BMC on product availability. Premium and Metallic finishes are subject to a nominal surcharge, contact BMC for additional information.
 ** Consult Berridge on pricing and availability for Print Pattern Finishes.

BMC SAN ANTONIO
 6515 Fratt Rd.
 San Antonio, TX 78218
 (210) 650-3050
 Fax (210) 650-0379

BMC HOUSTON
 1720 Maury St.
 Houston, TX 77026
 (713) 223-4971
 Fax (210) 650-0379

BMC DALLAS N/
 2015 California Crossing
 Dallas, TX 75220 A
 (972) 506-8496 N/
 Fax (210) 650-0379 A

BMC DENVER N/
 7505 E. 41st Ave.
 Denver, CO 80216 A
 (303) 322-3703 N/
 Fax (210) 650-0379 A

BMC CHICAGO
 1175 Carolina Dr.
 W. Chicago, IL 60185
 (630) 231-7495
 Fax (210) 650-0379

BERRIDGE FLORIDA SALES CORPORATION***
 8802 Venture Cove
 Tampa, FL 33637
 (813) 335-4505
 Fax (210) 650-0379

BMC PHOENIX
 5717 W. Washington St.
 Phoenix, AZ 85043
 (602) 385-1237
 Fax (210) 650-0379

BMC ATLANTA
 319 Lee Industrial Blvd.
 Austell, GA 30168
 (770) 941-5141
 Fax (210) 650-0379

BMC OKLAHOMA CITY
 1400 Exchange Ave.
 Oklahoma City, OK 73108
 (405) 248-7404
 Fax (210) 650-0379

BMC KANSAS CITY
 1235 Southwest Blvd.
 Kansas City, KS 66103
 (913) 227-0855
 Fax (210) 650-0379

BERRIDGE CALIFORNIA SALES CORPORATION***
 8442 Sultana Ave.
 Fontana, CA 92335
 (562) 402-2081
 Fax (210) 650-0379
 Berridge California and Florida Sales Corporations are separate entities from Berridge Manufacturing Company.



CORPORATE & SALES HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (210) 650-3050
 Fax (210) 650-0379



WWW.BERRIDGE.COM